





IEEE/PES Substation Committee - GIS Subcommittee






IEEE

**Substations Committee
GIS Subcommittee K0
Working Group K2
Module
Mixed Technologies Switchgear**

T&D Chicago MTS Mixed Technologies Switchgear




- 1 -



IEEE/PES Substation Committee - GIS Subcommittee


**Contents
Mixed Technologies Switchgear MTS**

**A Definitions
B Introduction to MTS
C Design Features
D Typical Layouts
E Applications
F Conclusion**










T&D Chicago MTS Mixed Technologies Switchgear

- 2 -



IEEE/PES Substation Committee - GIS Subcommittee




Contents

MTS


- A** Definitions
- B** Introduction to MTS
- C** Design Features
- D** Typical Layouts
- E** Applications
- F** Conclusion







T&D Chicago MTS Mixed Technologies Switchgear

- 3 -



IEEE/PES Substation Committee - GIS Subcommittee



View of Future Switchgear Technologies Drivers


Changing Customer demands

- Minimum life cycle costs:
Investment, Operation and Maintenance **together**
- High availability
- High flexibility
- Compact solutions for optimizing existing areas
- Competent system-solutions instead of product-suppliers


..... require Innovative Solutions

T&D Chicago MTS Mixed Technologies Switchgear







- 4 -



IEEE/PES Substation Committee - GIS Subcommittee




Definition* of MTS


Mixed Technologies Switchgear is defined by the following:

- Compact switchgear assemblies consist of at least one switching device directly connected to, or sharing components with, one or more other devices such that there is an interaction between the functions of the individual devices.
- Such assemblies are made up of individual devices and are designed, tested and supplied for use as a single unit. The interaction between devices may be due to proximity, sharing of components or a combination of both.
- The assemblies may contain components of air insulated switchgear (AIS) only or a combination of AIS and gas insulated switchgear (GIS), so called mixed technology switchgear (MTS) and may be delivered entirely prefabricated or partially assembled. * IEC 62271-205







T&D Chicago MTS Mixed Technologies Switchgear - 5 -




IEEE/PES Substation Committee - GIS Subcommittee




Space Comparison of AIS, GIS and MTS CB-bays 420 kV level



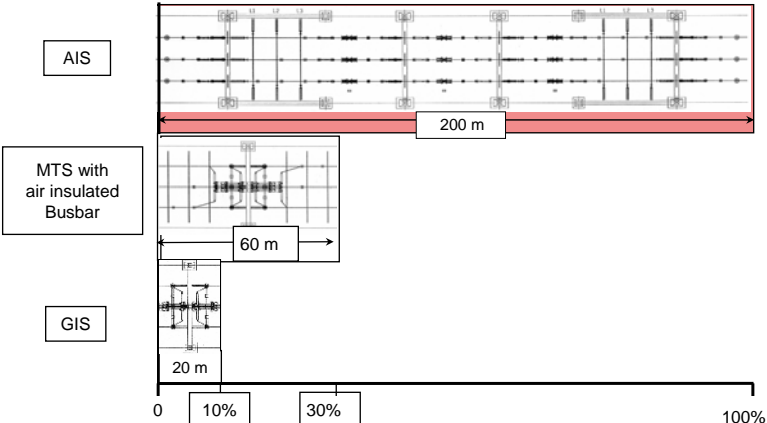






T&D Chicago MTS Mixed Technologies Switchgear - 6 -



IEEE/PES Substation Committee - GIS Subcommittee

Mixed Technologies Switchgear build of Switchgear Assemblies



Switchgear Assemblies

Component – Bay - Switchgear

Insulation
Considerations

Installation & Functionality
Considerations

AIS

Conventional

GIS

Compact

Hybrid
IS


Combined

Mixed technologies switchgear (MTS) concerns the following combinations:

- AIS in compact and/or combined design
- GIS in combined design
- Hybrid IS in compact and/or combined design assembled together and using a common structure in order to minimize the installation time.


T&D Chicago MTS Mixed Technologies Switchgear







- 7 -



IEEE/PES Substation Committee - GIS Subcommittee

Contents MTS



A Definitions




B Introduction to MTS

C Design Features

D Typical Layouts


E Applications

F Conclusion










T&D Chicago MTS Mixed Technologies Switchgear

- 8 -



IEEE/PES Substation Committee - GIS Subcommittee




Design Features

● **Special Features**


- Using already known equipment components with high reliability
- Compact design
- Integrated functions
- Modular system
- Minimum space requirements
- Outdoor design
- Assembled and tested transportation units
- Reduced planning and erection time
- Easy exchange of complete modules





T&D Chicago MTS Mixed Technologies Switchgear

- 9 -



IEEE/PES Substation Committee - GIS Subcommittee




Contents

MTS

- A Definitions
- B Introduction to MTS
- C Design Features
- D Typical Layouts
- E Applications
- F Conclusion


T&D Chicago MTS Mixed Technologies Switchgear





- 10 -




IEEE/PES Substation Committee - GIS Subcommittee

Single Line Layout







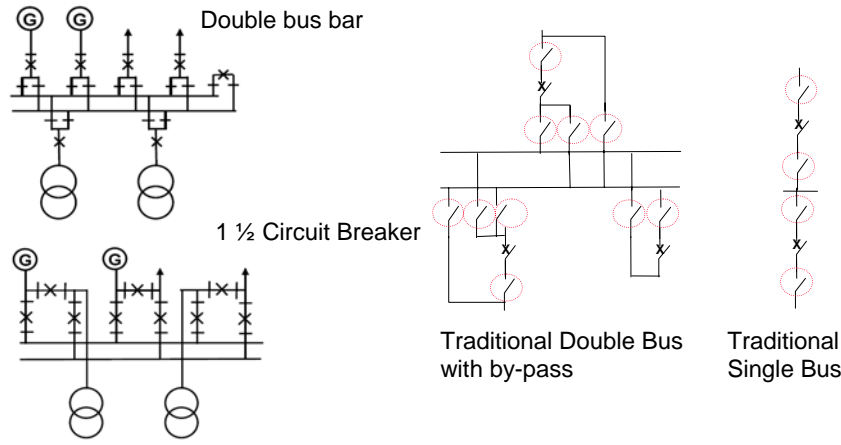

● Typical Single Line Layout since more than 80 years




T&D Chicago MTS Mixed Technologies Switchgear





- 11 -



IEEE/PES Substation Committee - GIS Subcommittee

Design on HV Substations based on Mixed Technology, Diagram & Layout









New 420/550 kV approach of REE drives on **New Segregated Ring – NSR, substation design** based on:


- **Technology**
 - GIS by reliability, flexibility and LCC (Life Cycle Cost)
- **Diagram**
 - Meshed Ring by simplicity, uniformity and flexibility
- **Layout**
 - Segregated phases by modularity, adaptability and cost

T&D Chicago MTS Mixed Technologies Switchgear




- 12 -



IEEE/PES Substation Committee - GIS Subcommittee




NSR? - What is NSR* ?


Solutions set for HV Substations needs

- **Integral:** regarding diagrams, switching equipment and layout
- **Availability and Reliability:** GIS values and redundancy by diagram
- **Modular:** it's developed depending on necessities
- **Compact and Simplified:** not unnecessary elements as bus bars
- **Uniform:** All substations with same solutions
- **Low maintenance :** Closest approach to zero maintenance
- **Environmentally integratable**
- **Life cycle cost optimized**


T&D Chicago MTS Mixed Technologies Switchgear

* 


- 13 -




IEEE/PES Substation Committee - GIS Subcommittee




Meshed Ring Substation Design integrates all solutions




Pi




T




H



1 ½ Circuit Breaker




Meshed Ring



1 Circuit Breaker


T&D Chicago MTS Mixed Technologies Switchgear



- 14 -





IEEE/PES Substation Committee - GIS Subcommittee


NSR 1 Circuit-Breaker Single-Line Diagram




SF6




T&D Chicago MTS Mixed Technologies Switchgear

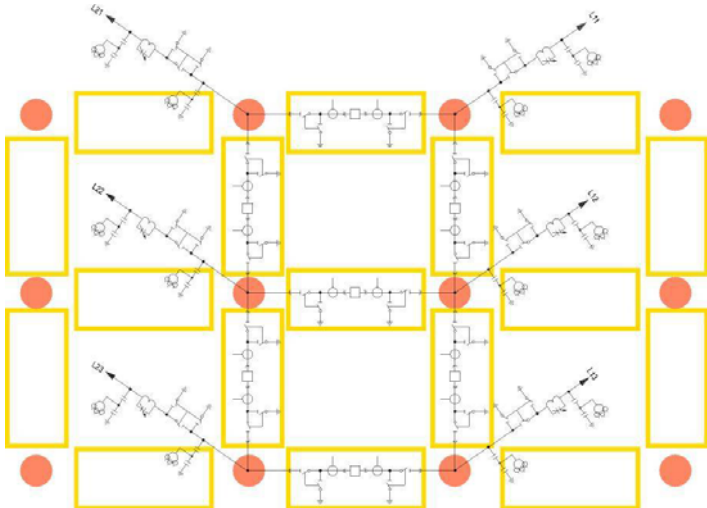

- 15 -





IEEE/PES Substation Committee - GIS Subcommittee


**Adaptation of NSR to existing
1½ Circuit-Breaker Single-Line Diagram**




SF6




T&D Chicago MTS Mixed Technologies Switchgear

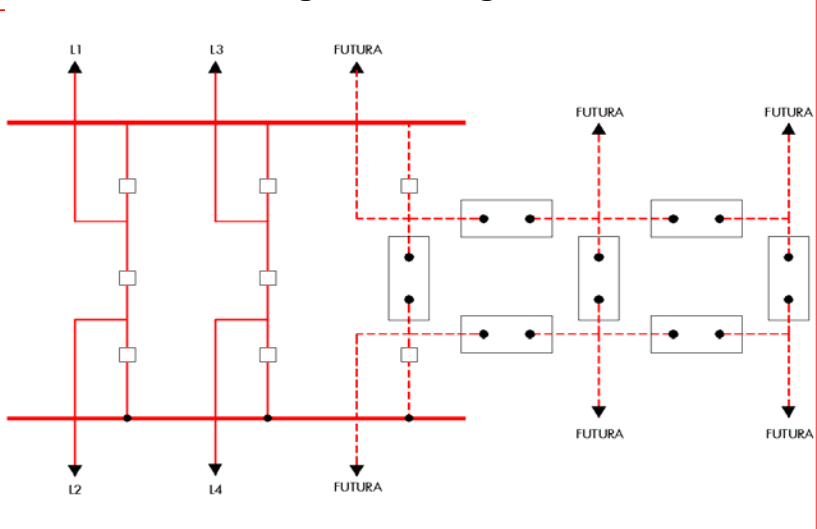
- 16 -




IEEE/PES Substation Committee - GIS Subcommittee



MTS 550kV Bay Module For 1½ CB-Arrangement With Vertical Bushings

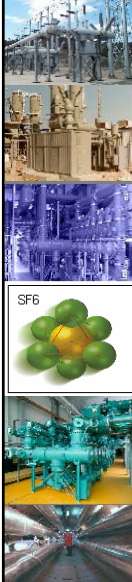

SF6

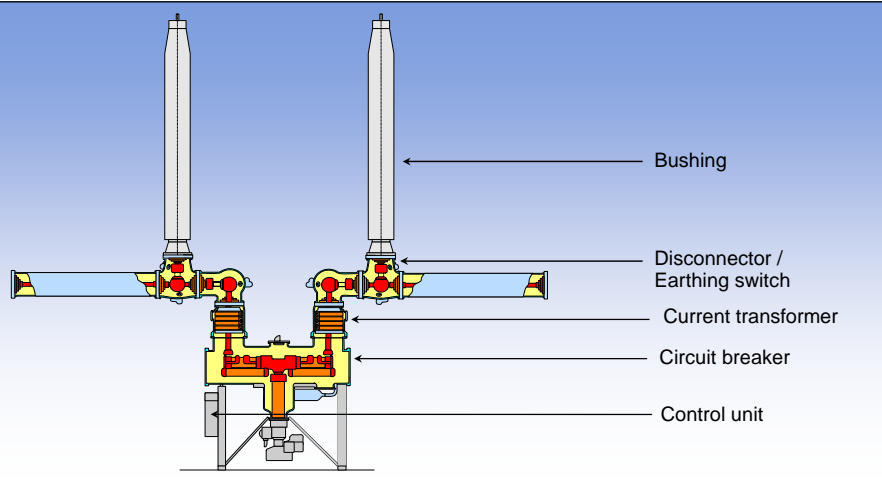

Bushing

Disconnecter /
Earthing switch


Current transformer

Circuit breaker


Control unit

T&D Chicago MTS Mixed Technologies Switchgear


- 17 -



IEEE/PES Substation Committee - GIS Subcommittee




MTS Module 420/550 kV Flexibility

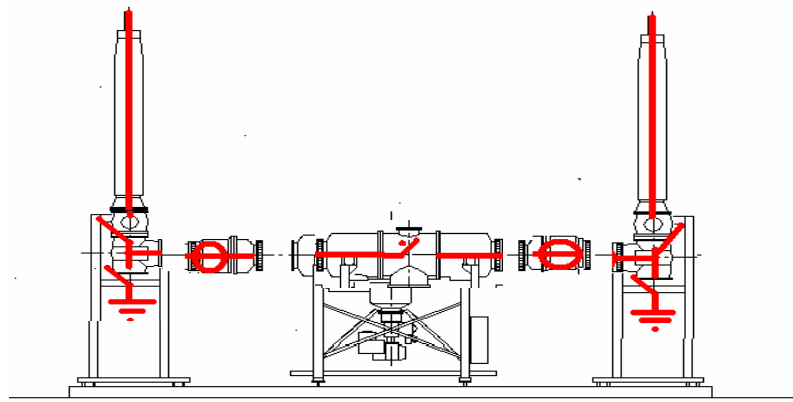


T&D Chicago MTS Mixed Technologies Switchgear


- 18 -



IEEE/PES Substation Committee - GIS Subcommittee



NSR Physical Layout- Diagram

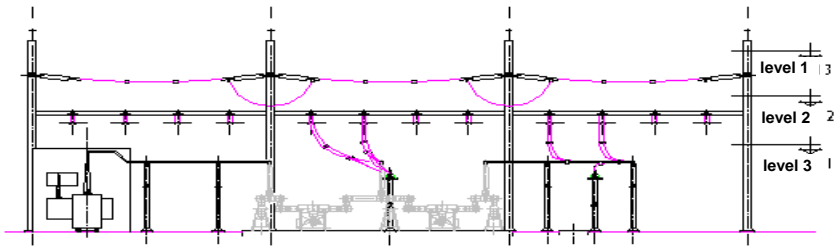


level 1 3


level 2 2

level 3 1

Example REE, Spain




SF6

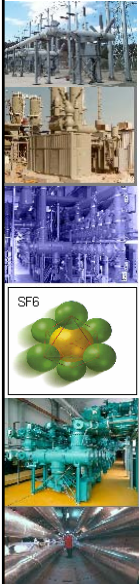


T&D Chicago MTS Mixed Technologies Switchgear


- 19 -




IEEE/PES Substation Committee - GIS Subcommittee



REE Spain 420 kV Ring Arrangement






SF6




T&D Chicago MTS Mixed Technologies Switchgear

- 20 -





IEEE/PES Substation Committee - GIS Subcommittee



Comparison MTS / GIS
4 CB-Arrangement, 145kV




MTS

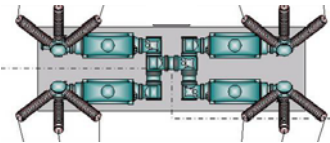
GIS

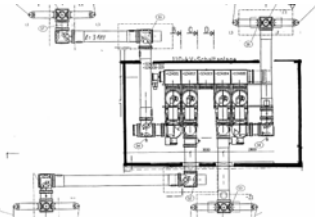


T&D Chicago MTS Mixed Technologies Switchgear


- 21 -




IEEE/PES Substation Committee - GIS Subcommittee

Application of MTS 145 kV






H- Arrangement

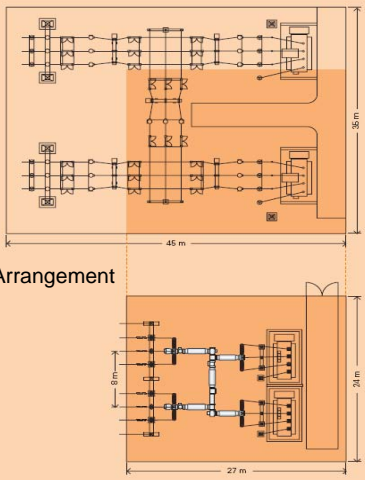


Previously: Air-insulated switchgear unit; Space requirement: approx. 1600 m²





Subsequently: HIS - Highly Integrated Switchgear; Space requirement: approx. 650 m²

Space reduction 60%



T&D Chicago MTS Mixed Technologies Switchgear







- 22 -

IEEE/PES Substation Committee - GIS Subcommittee

Contents

MTS

A Definitions

B Introduction to MTS

C Design Features



D Typical Layouts

E Applications

F Conclusion

T&D Chicago MTS Mixed Technologies Switchgear







- 23 -





IEEE/PES Substation Committee - GIS Subcommittee

MTS Applications

Outdoor (1)












GIS Project PUGET
Sound Electric, USA
Bow Lake
145 kV 40 kA, 3150 A

T&D Chicago MTS Mixed Technologies Switchgear


- 24 -




IEEE/PES Substation Committee - GIS Subcommittee



MZS Applications Puget Sound

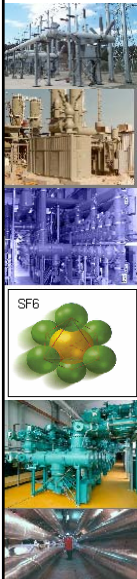

● Plan View

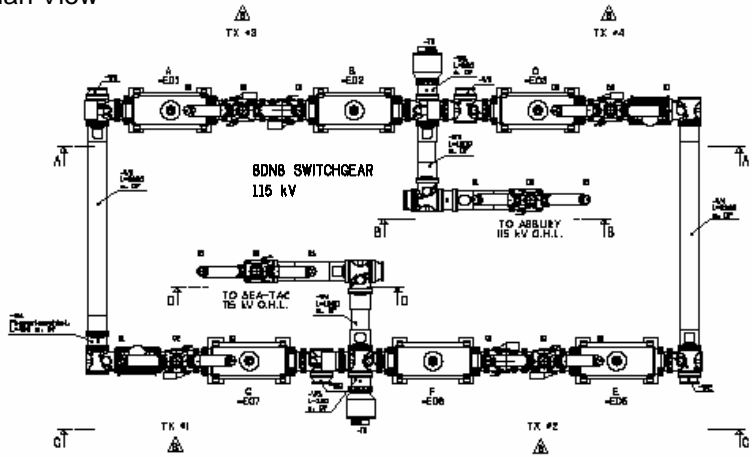


8DN6 SWITCHGEAR
115 kV

TO AEA-TAC
115 kV O.H.L.


TO ABILITY
115 kV O.H.L.

T&D Chicago MTS Mixed Technologies Switchgear


- 25 -




IEEE/PES Substation Committee - GIS Subcommittee



MTS Applications Outdoor (2)

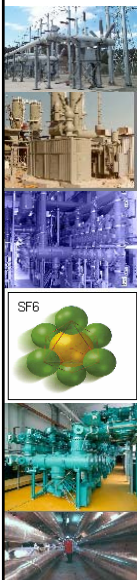




Compact substation
H-arrangement
UW Badenstedt, Germany

145 kV/31,5 kA, 4000 A


2001


T&D Chicago MTS Mixed Technologies Switchgear

- 26 -




IEEE/PES Substation Committee - GIS Subcommittee



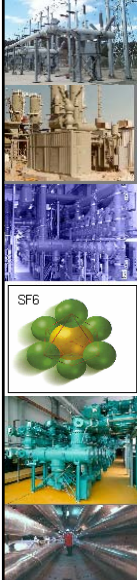


MTS Applications Outdoor (3)




Compact substation
H-arrangement
Lai Wu Substation,
Peoples Republic of
China

145 kV/31,5 kA, 4000 A

2002




SF₆




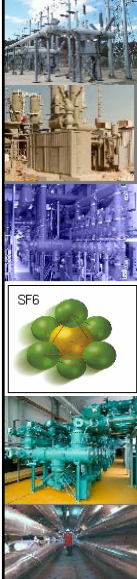
T&D Chicago MTS Mixed Technologies Switchgear

- 27 -




IEEE/PES Substation Committee - GIS Subcommittee







MTS Applications Outdoor (4)



Compact GIS Substation
Termobahia
230 kV, 50 kA, 3150 A
Insulation Type:
- Single Phase
Feeder Bay to AIS and
Overhead Line




SF₆





T&D Chicago MTS Mixed Technologies Switchgear

- 28 -




IEEE/PES Substation Committee - GIS Subcommittee



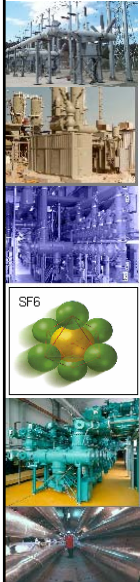


MTS Applications Special Applications




**145 kV/31,5 kA
Connecting a
Windfarm**


T&D Chicago MTS Mixed Technologies Switchgear

- 29 -




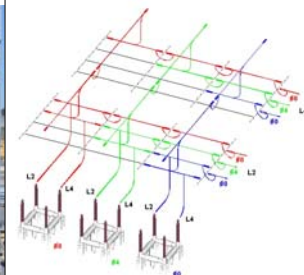
IEEE/PES Substation Committee - GIS Subcommittee



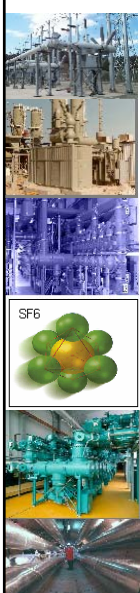

Ringarrangement - NSR Physical Layout Double Busbar S/S Palos de la Frontera 400 kV






T&D Chicago MTS Mixed Technologies Switchgear

- 30 -



MTS 420kV Ostiglia, Italy

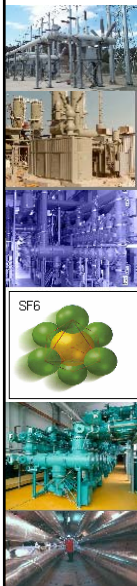


T&D Chicago MTS Mixed Technologies Switchgear

- 31 -




Contents MTS

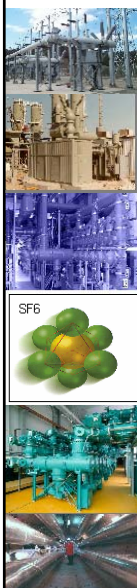


- A Definitions
- B Introduction to MTS
- C Design Features
- D Typical Layouts
- E Applications
- F Conclusion

T&D Chicago MTS Mixed Technologies Switchgear




- 32 -



IEEE/PES Substation Committee - GIS Subcommittee




Conclusion






- Mixed Technologies Switchgear modules can be used in any substation application
- Compact modules
 - Gives the highest availability
 - Suitable for applications with high operating frequency (Capacitor and reactor)
 - Excellent for extension of existing S/S.
- Combined modules
 - High Felexibility
 - Cost optimised solution
 - Shortest erection time
 - Minimum of space



T&D Chicago MTS Mixed Technologies Switchgear
- 33 -



IEEE/PES Substation Committee - GIS Subcommittee



Thank you for your attention for the MTS Module.


T&D Chicago MTS Mixed Technologies Switchgear
- 34 -