




Micromouse Webinar

An overview to design and build a Micromouse
February 18, 2016

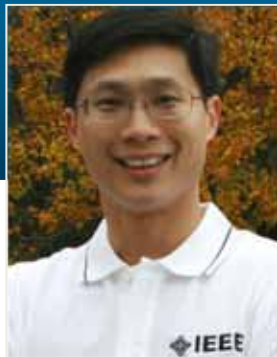

Soon Wan (gimsoon@ieee.org)

IEEE-USA and Region 1 Membership Development Chair



Abstract

- A Micromouse is a small robot vehicle that is able to navigate its way through an unknown maze. It is autonomous, battery-operated and self-contained, encompassing computer technology, robotics and artificial intelligence. The main challenge for the Micromouse designers is to import the Micromouse with an adaptive intelligence which enables exploration of different maze configurations, and to work out the optimum route with the shortest run time from start to destination and back. In addition, the Micromouse must reliably negotiate the maze at a very high speed without crashing into the maze walls.
- The annual IEEE Region 1 Student Conference hosts the Micromouse Competition. The objective of the competition is to build a Micromouse that can negotiate a specified maze in the shortest time. This on-line webinar will introduce the design and development of the hardware and software of a Micromouse. The take away will be the fundamental knowledge with best practices and design strategies to build a Micromouse, and be really for the 2016 Region 1 Micromouse Competition.

Webinar Outline:

- Introduction

- What is Micromouse?
- Video – An International Micromouse Competition
- Soon's and others Micromice
- Maze and Micromouse Specifications



- Micromouse Design Overview

- Performance
- Hardware Design (Sensor, Motor Drive, Micro-Controller, Power Supply)
- Software Design (Maze Solver Algorithm, Search Algorithm, Movement)

- Micromouse Competition

- IEEE Region 1 Student Conference
- APEC (Applied Power Electronics Conference)

- Micromouse Simulation Tool

- Questions and Sharing Design Ideas





Introduction

What is Micromouse?

- ▶ A small microprocessor-controlled mobile robot which is capable to navigate its way in an unknown maze.
- ▶ Micromouse is autonomous, battery-operated and self-contained, encompassing computer technology, robotics and artificial intelligence.
- ▶ Main challenge is to import the Micromouse with an adaptive intelligence that enables exploration of different maze configurations. Then, to work out the optimum route with the shortest run time from start to destination and back.
- ▶ Micromouse must reliably negotiate the maze at a very high speed without crashing into the walls of that maze.


Soon's Micromouse

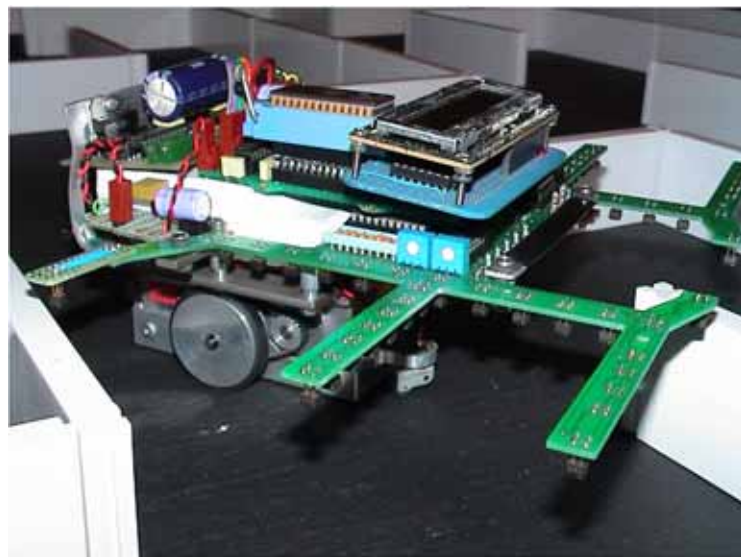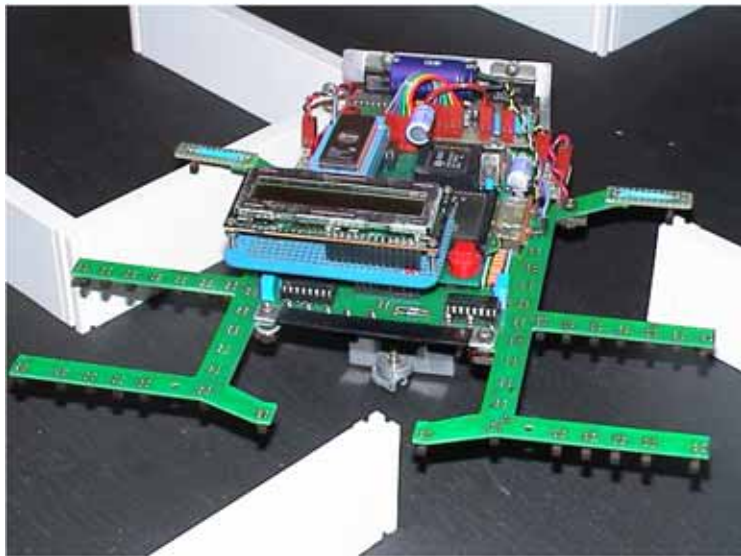


- ▶ Built when at High School
- ▶ Name: ZAP
- ▶ 1991 International Micromouse Competition Champion at Hong Kong



Soon's Micromouse

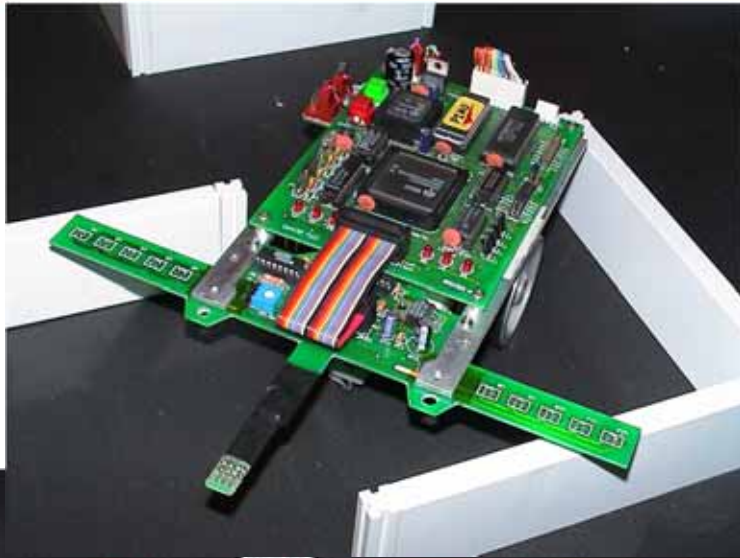

- ▶ Built when in 1996
- ▶ Name: Pinocchio
- ▶ 1997, 1998, 1999 IEEE Region 1 Micromouse Champion

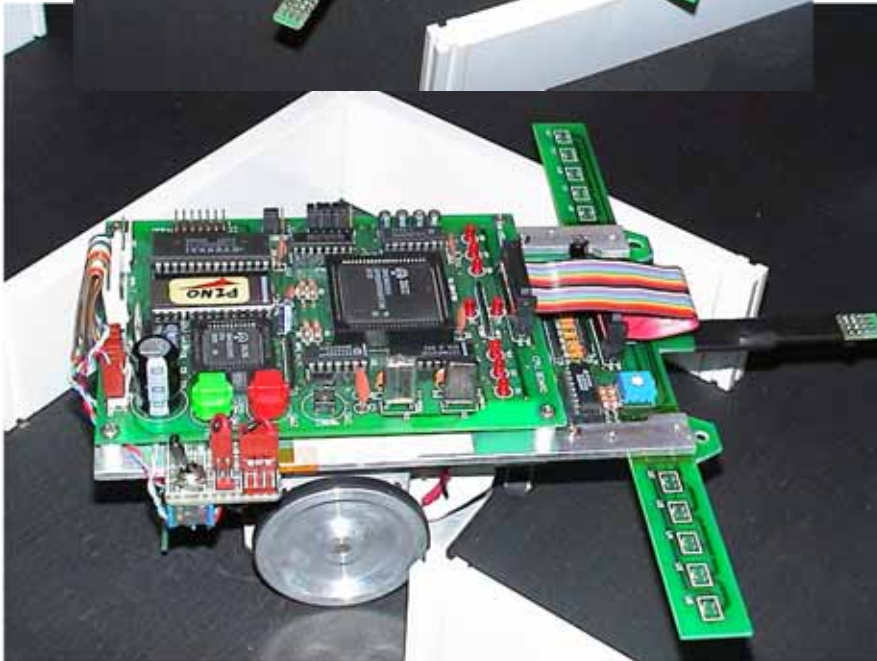

Soon's Micromouse



- ▶ Built when at Vicor Corporation
- ▶ Name: VI-Mouse
- ▶ Most reliable micromouse at APEC 2001 International Micromouse Competition



Soon's Micromouse Activities



1998 APEC Micromouse Competition at Dallas TX



Origin of Micromouse



Announcing the Amazing Micro-Mouse Maze Contest

It was through mere happenstance that *Spectrum's* editors learned—by means of word propagated along the industry grapevine—of a so-called electronic mouse ("le mouse électronique" were the exact words that reached our ears). Upon assigning our top investigative reporters to the task of finding out the true facts, we quickly found that in *January* the magazine *Machine Design* had indeed called for designers and constructors of "electronic" mice to enter The Great Clock Climbing Contest. Contestants would be required to construct a mechanical mouse that could attempt to climb a vertical mesh screen ("le clock," one supposes). Our disappointment came when it was hinted the mice would merely be battery-powered and, probably, electric-motor driven. No electronics here, our purist minds concluded.

Nevertheless, we found the project interesting enough to search further into its history. We discovered that, back in 1972, *Machine Design* sponsored Le Mouse 5000, a contest described by the magazine as having the objective of producing a vehicle powered only by the spring from a mousetrap. As MD reported it: "Prizes were awarded for the longest runs. A total of 94 entrants sent their spring-powered cars down the racetrack... while a capacity crowd viewed the proceedings, The first-place 'mousemobile' traveled 825.3 feet."

Then, last November, Stephen Jacobsen's design engineering class at the University of Utah built the first battery-powered climbing mice. As part of the class assignment, the students constructed vehicles using commonly available parts. Among the conclusions reached by the student researchers, who were required to send their mice up a 30-foot-long 1/8-inch mesh screen, was a general consensus that a standard 9-volt transistor radio battery was the best power source. Most of the test vehicles, it was reported, used a 900-r/min motor geared down to 400 r/min at its drive shaft. Professor Jacobsen, whose observations regarding the results of the classroom research project were reported in MD, noted that a number of the mechanical mice failed to keep a grip on the screen for a variety of reasons. Some had optimistically assumed perfection of the screen and could not cope with the flaws in the course. Some were too heavy, or had a center of gravity too far from the screen. Others simply ran off the sides of the 3-foot-wide screen. On still others, the complex drive train sapped too much of the motor's power.

Be that as it may, the Utah tests led to the idea of the Le Mouse II contest announced in *January* by *Machine Design*. (Sorry, the deadline for registration was March 1.) Beyond that, it set *Spectrum's* engineer-editors to wondering why a true electronic mouse could not be built. We put our heads together and, after a few days of concentrated after-hours brainstorming, became convinced that the plan was feasible. In short, *Spectrum* would run its own real electronic mouse contest. The mice would be required to negotiate a maze (officially named the Mystery Mouse Maze because its configuration would be kept a closely guarded secret until race day). The contestants would each design and build his or her own mouse (officially termed a Micro-Mouse, because it would have to contain its own logic and memory—which only a microprocessor or its equivalent can provide).

Soon our editors were consulting with major manufacturers of microprocessors. Ideas were generated and discarded. A set of standard mouse-maze modules was proposed, criticized, and a new set proposed. Various cross sections of the maze course were considered and discarded. Finally, one was chosen. Would its walls be reflective so as to permit the use of optical sensors? The answer was decided: yes. What about the track surface? How about using 00 sandpaper? The answer: probably.

What about motive power? Any restrictions? Not really. Would a live mouse be permitted? Perhaps, but only if it were contained within a truly hermetically sealed package—to prevent unwitting alterations in the track's coefficient of friction.

Of course, certain restrictions on how contestants could be permitted to direct their mice will be necessary. For example, once released they could not be directed through either hard-wired or radio inputs. Thus, any mouse that looks suspiciously like an elephant, or, more particularly, like a giraffe, may be subject to internal examination.

Meanwhile, as *Spectrum's* staff, with the aid of our microprocessor applications consultants, zeros in on the parameters of the Amazing Micro-Mouse Maze Contest, we'll keep potential contestants informed. In the interim, of course, if by chance you've entered *Machine Design's* electromechanical mouse climb, we wish you luck. But for a more exciting challenge, stand by to enter *Spectrum's* super contest. Drop us a note if you want to be mailed more details.

Donald Christiansen, Editor

IEEE Spectrum first introduced the amazing micromouse in 1977

SPECIAL REPORT

Microprocessors

The amazing micromice: see how they won

Probing the innards of the smartest and fastest entries in the Amazing Micro-Mouse Maze Contest

The stage was set. A crowd of spectators, mainly engineers, were there. So were reporters from the *Wall Street Journal*, the *New York Times*, other publications, and television. All waited in expectancy as *Spectrum's* Mystery Mouse Maze was unveiled. Then the color television cameras of CBS and NBC began to roll; the moment would be recreated that evening for viewers of the Walter Cronkite and John Chancellor-David Brinkley news shows. The final races of the Amazing Micro-Mouse Maze Contest were beginning at the National Computer Conference in New York, and what was perhaps most amazing was the wide public interest that the competition had evoked almost since its inception.

Publicity was not the chief goal when the micromouse contest was conceived. Nor did *Spectrum's* editors suspect that more than 6000 entries would be received. A modest announcement of the contest was made in the May 1977 issue of *Spectrum* by Editor Don Christiansen, who first suggested the contest. Later *Computer* magazine became a cosponsor.

A secret maze was constructed, and the show went on the road, with lime trials at the National Computer Conference in Anaheim, Calif., Personal Computing '78 in Philadelphia, WESCON in Los Angeles, and ELECTRO '79 in New York City. The challenge was to employ microprocessor technology to design and construct a self-contained "thinking mouse" that could solve a maze and, in subsequent trials, avoid its earlier mistakes. A loophole in the rules, however, let strictly mechanical, "nonintelligent" mice enter, too.

At the finals in New York's Sheraton Centre, three engineers—two from Battelle Northwest and one from WED Enterprises—teamed up to score a sweep as two of their entries took prizes for fastest and smartest mouse, respectively. Four other micromice solved *Spectrum's* maze, and two won prizes. Of the 15 micromice entered, only six managed to solve the maze at least once. Cattywampus, a smart micromouse, did not solve the maze but won a prize for "the most ingenious design."

Mice that could learn

Learning by exploring was, in essence, the algorithm used by Moonlight Express (Fig. 1) as it negotiated the maze in record learning time. Designed and built by Art Boland and Ron Dibeck of Battelle Northwest Laboratories, Richland, Wash., and Phil Stover of WED Enterprises, Glendale, Calif., it was an improved version of the Moonlight Special, a smart micromouse that had demonstrated its learning prowess at previous time trials of the contest as well as at the finals.

Roger Allan Associate Editor

The major difference between the Express and the Special was in their forward speeds: the Express had stepping motors with four times the torque used on the Special. Top motor speeds of 52.07 cm/s for the Express vs 20.32 cm/s for the Special were made possible. In addition the motor-drive circuitry for the Express was strengthened to handle the increased load of the new motors, and the Special's gear train was entirely eliminated.

Some of the hardware used in the Special—for example, interrupt logic—was eliminated by the use of IC devices that were exclusively from the Z-80A family of components (the Express was based on the Z-80A microprocessor, as was the Special). This represented only a slight modification of the earlier electronic circuitry in the Special (Fig. 2).

A distinguishing feature of the Special was that it looked like a real mouse. Everything else—the optical-sensor arrangement, battery supply, and the high-level software—were the same in the Express as in the Special.

The Moonlight Express and Special were equally intelligent. Both went through the maze on their first runs, exploring paths and mapping nodes (or three-way crossings) into their memories. Both solved the maze on each of their second and third tries, traveling the shortest possible maze routes, from entrance to exit.


Doing it with logic

Not all micromice at the finals contained microprocessors. Dudley and Mushka, two Canadian entries, managed to solve the maze with simple IC logic (Fig. 3). Both had been built from the same basic design, and each solved the maze on its last run in 252 and 94.74 s, respectively. Dudley was entered by David Schaefer of NCR, Waterloo, Ontario, and Roger Sanderson of the University of Waterloo. Mushka, which won the runner-up smart prize, was entered by Bob Norton of Hamilton, Ontario, and John Ditrer of the University of Waterloo.



The original designs for Dudley and Mushka (Fig. 4) called for a 1602 microprocessor, a Model 2758 EPROM with 1 k × 8 b of memory, a peripheral interface adapter IC, and three infrared sensors. The sensors were to detect the presence of walls around the mouse and to allow it to negotiate the maze without touching the walls. A software algorithm that would have provided the mouse with learning capability on successive trials was to be included. All of this was scrapped at the last minute, however, in favor of a simpler logic circuit due to insufficient time before the finals to do this.

Each mouse used two 3-V hobby dc motors to drive left and right wheels. Front and right switches activated a pair of one-shot multivibrators and three OR gates. Normally the mouse's left wheel was driven forward to the right. When the

New Generation Micromice

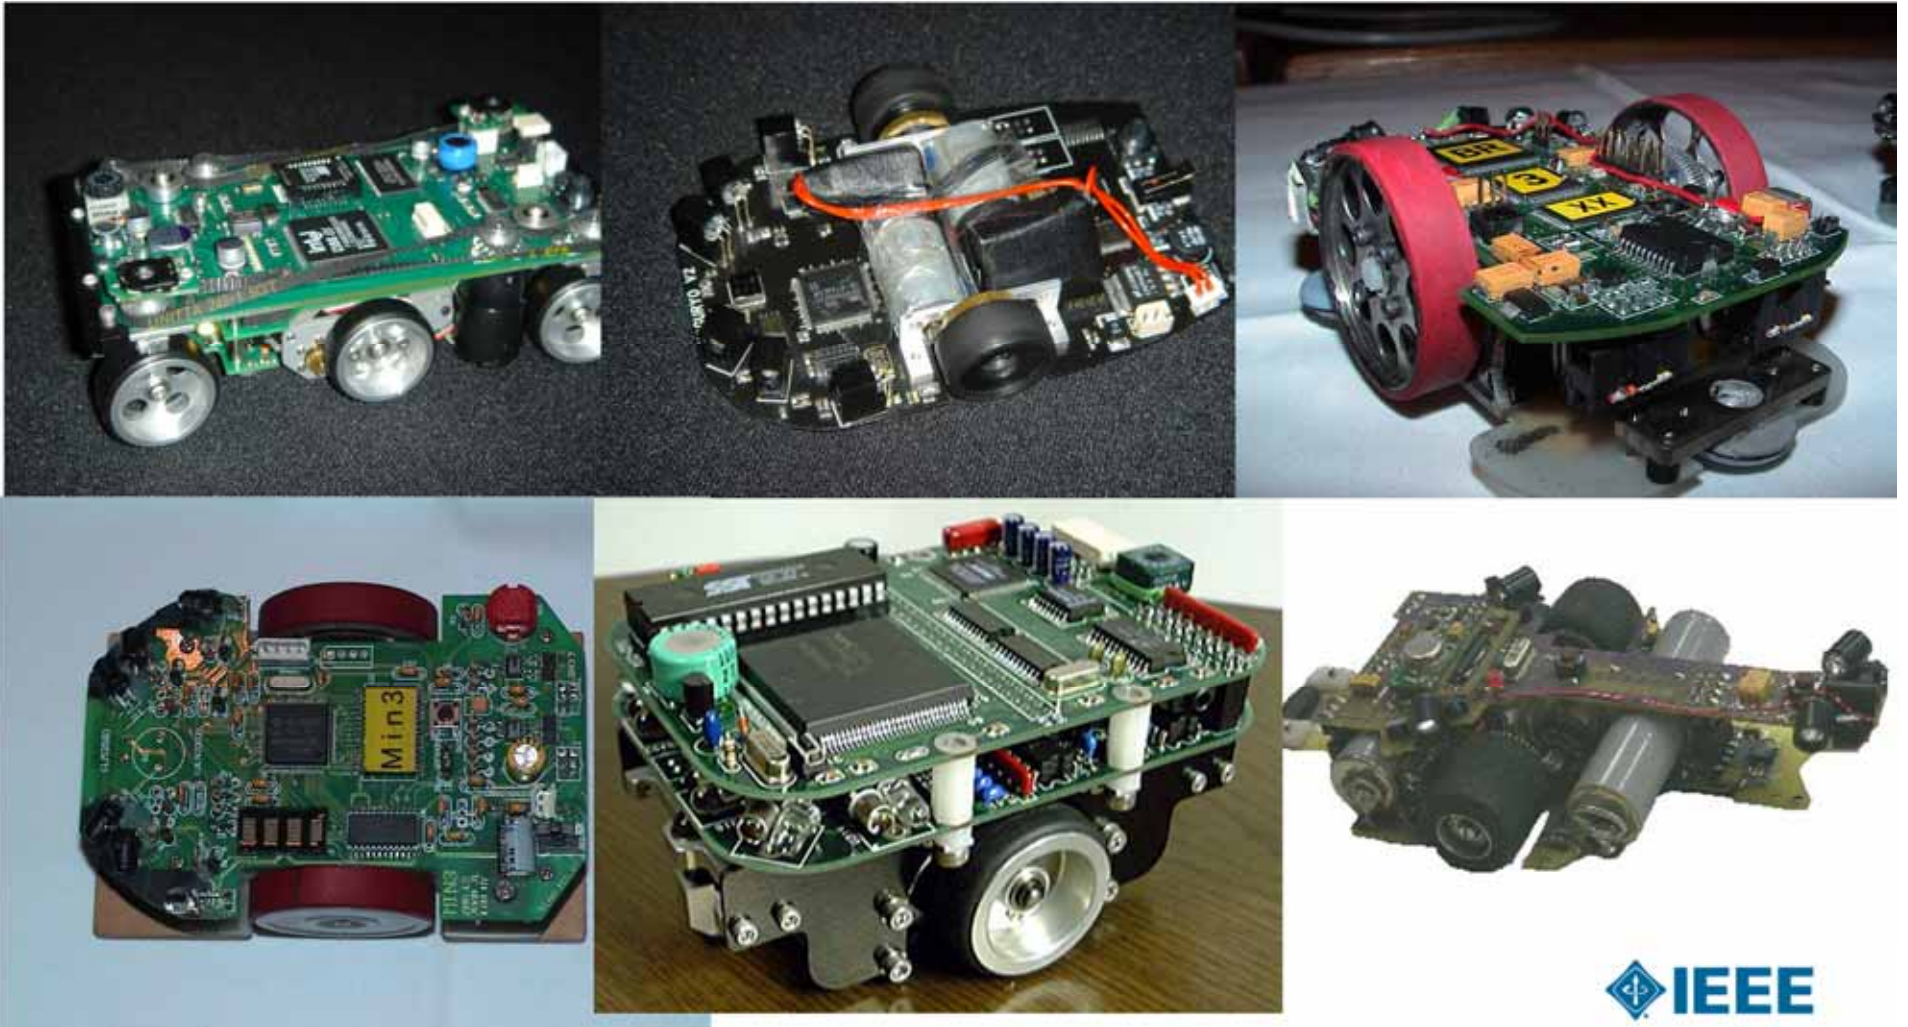

Current Generation Micromice

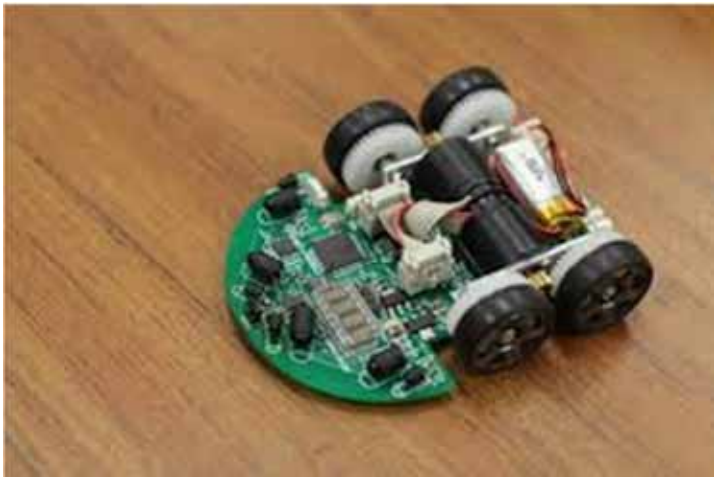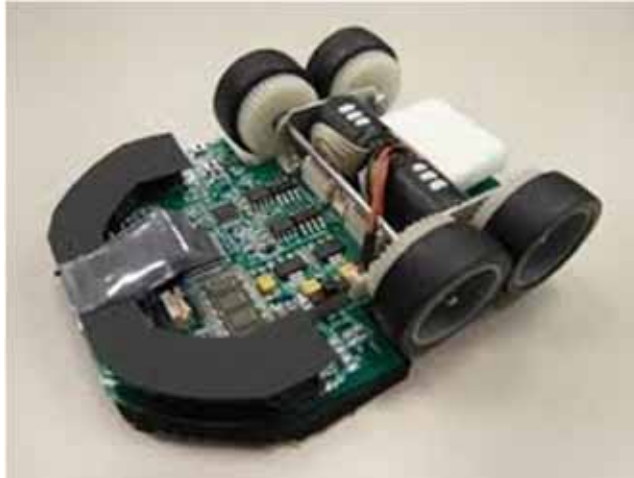





Maze and Micromouse Specification

Maze Specifications


- Maze comprises 16 x 16 of 18cm x 18cm unit squares
- Walls are 5cm high and 1.2cm thick
- Side walls is white color, and the top shall be red or white color
- Outside walls enclose the entire maze
- Maze floor shall be made of wood and finished with a non-gloss paint
- Start square is at one of the 4 corners of the maze
- Destination is at the central square space (4 squares)
- There must be at least one wall touching each pole

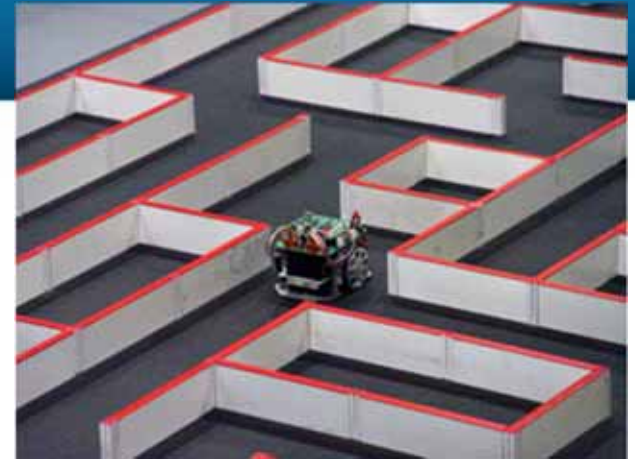

Maze Specifications (continue)

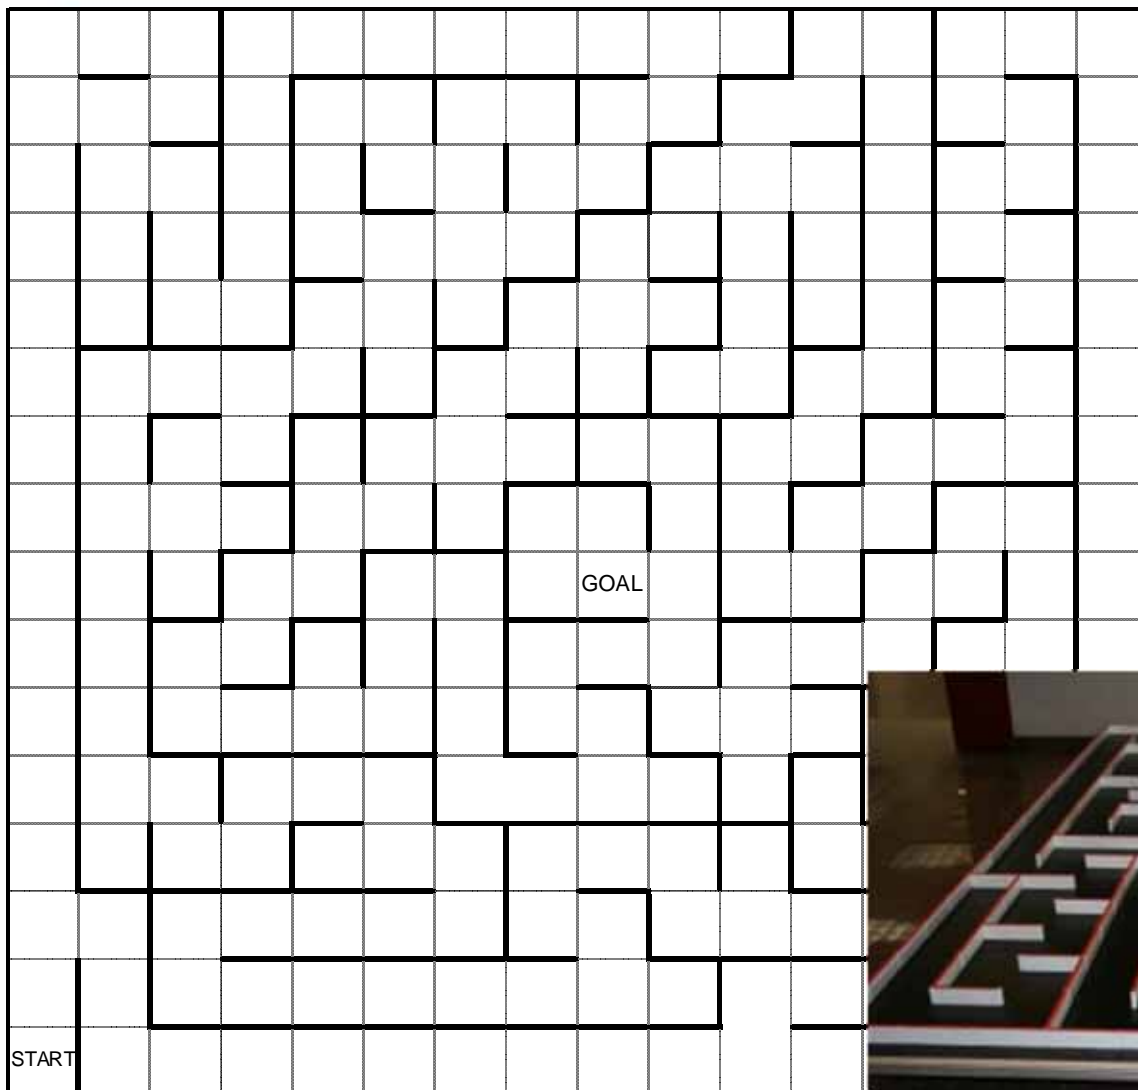

- 16 x 16 squares
- 18cm x 18cm unit square
- Maze Wall
 - 5cm High
 - 1.2cm Thick

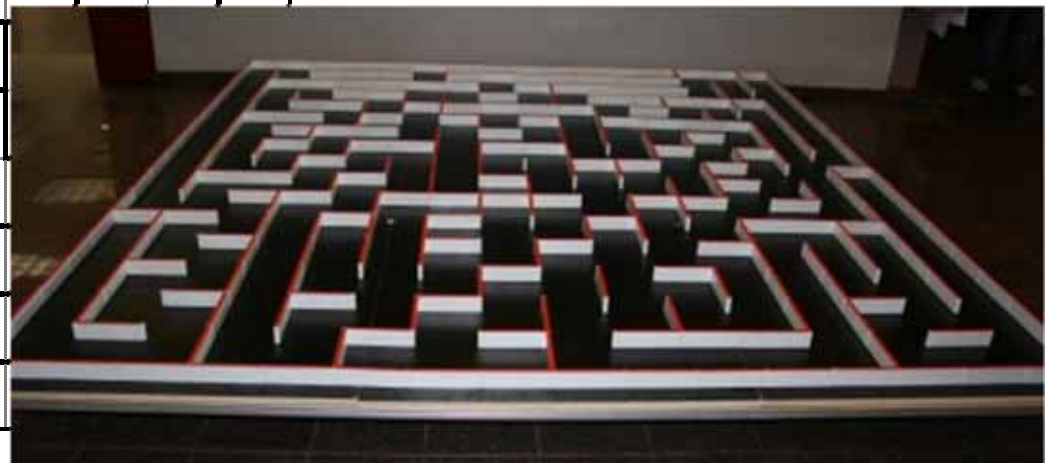

Maze Mapping

NORTH

START = 0x00

GOAL1 = 0x77

GOAL2 = 0x78

GOAL3 = 0x87

GOAL4 = 0x88

WEST

0F	1F	2F	3F	4F	5F	6F	7F	8F	9F	AF	BF	CF	DF	EF	FF
0E	1E	2E	3E	4E	5E	6E	7E	8E	9E	AE	BE	CE	DE	EE	FE
0D	1D	2D	3D	4D	5D	6D	7D	8D	9D	AD	BD	CD	DD	ED	FD
0C	1C	2C	3C	4C	5C	6C	7C	8C	9C	AC	BC	CC	DC	EC	FC
0B	1B	2B	3B	4B	5B	6B	7B	8B	9B	AB	BB	CB	DB	EB	FB
0A	1A	2A	3A	4A	5A	6A	7A	8A	9A	AA	BA	CA	DA	EA	FA
09	19	29	39	49	59	69	79	89	99	A9	B9	C9	D9	E9	F9
08	18	28	38	48	58	68	78	88	98	A8	B8	C8	D8	E8	F8
07	17	27	37	47	57	67	77	87	97	A7	B7	C7	D7	E7	F7
06	16	26	36	46	56	66	76	86	96	A6	B6	C6	D6	E6	F6
05	15	25	35	45	55	65	75	85	95	A5	B5	C5	D5	E5	F5
04	14	24	34	44	54	64	74	84	94	A4	B4	C4	D4	E4	F4
03	13	23	33	43	53	63	73	83	93	A3	B3	C3	D3	E3	F3
02	12	22	32	42	52	62	72	82	92	A2	B2	C2	D2	E2	F2
01	11	21	31	41	51	61	71	81	91	A1	B1	C1	D1	E1	F1
00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0



EAST

START

SOUTH

Micromouse Specifications

- A self-contained mobile robot
- Not leave anything behind while negotiating in the maze
- No combustion energy sources
- Must not step over, climb over, scratch, or damage the walls during exploring in a maze.
- Dimensions shall not greater than 25cm in length or width. But, there is no height limit.

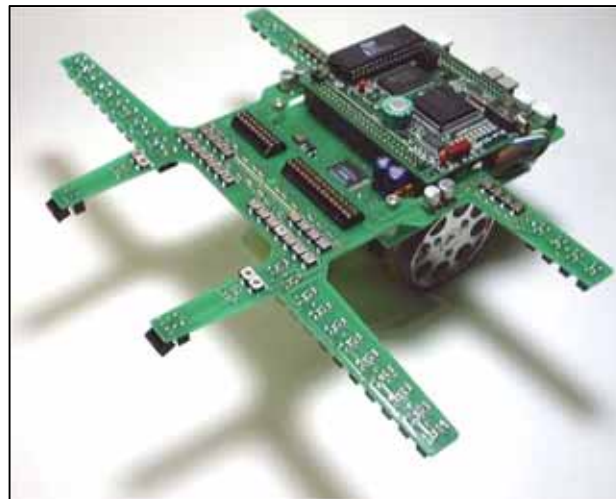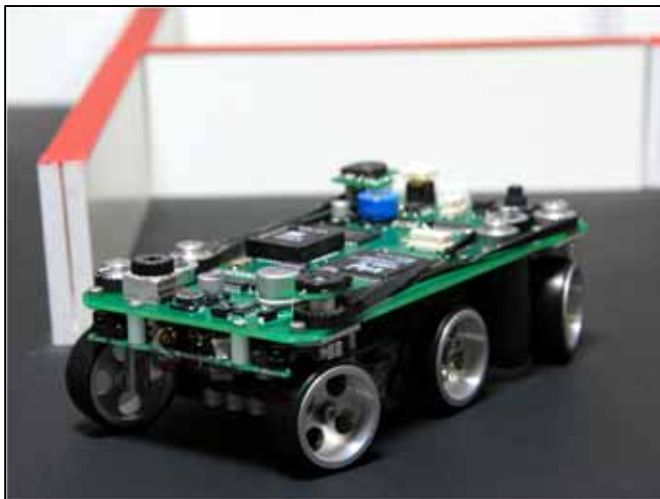



Micromouse Design

Micromouse Performance

- Performance can be measured by
 - Reliability
 - Speed
 - Intelligence
- Speed conflicts with reliability
 - High speed creates instability
- Proper motion control
 - Enable micromouse to run at higher speed without losing much on the reliability



Main Components

■ Hardware

- Micro-Controller
- Motor Driver with Motor
- Sensor
- Battery Pack
- Chassis, Wheels




■ Software

- IDE (Integrated Development Environment)
- Acceleration Profile Generator
- Simulator
- Program Loader

Micromouse Sensors

■ Type of Sensors

- Infra-Red Emitter/Detector
- Digital Compass
- Accelerometer
- Bumper Switch
- Rotary Encoder (wheel position)
- Rangefinder
- Sonar



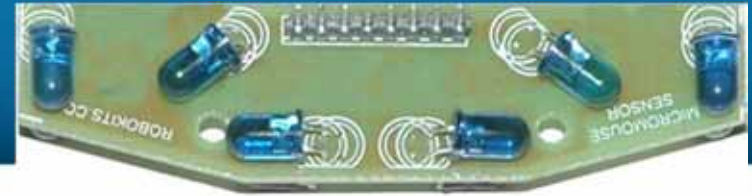


Micromouse Sensors

- Way of Sensing Walls


 - Top Down

 - Side

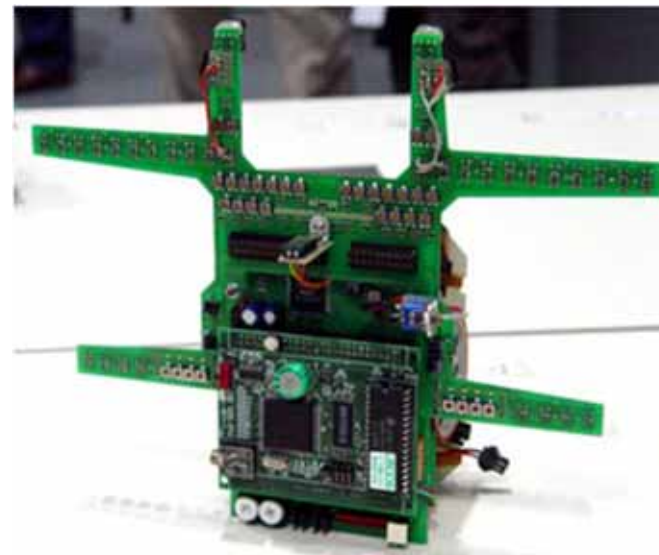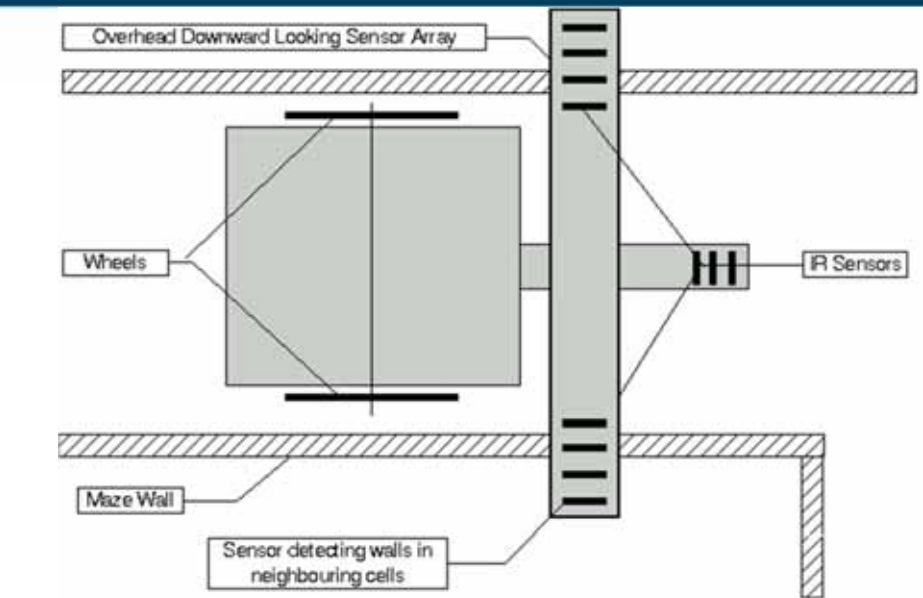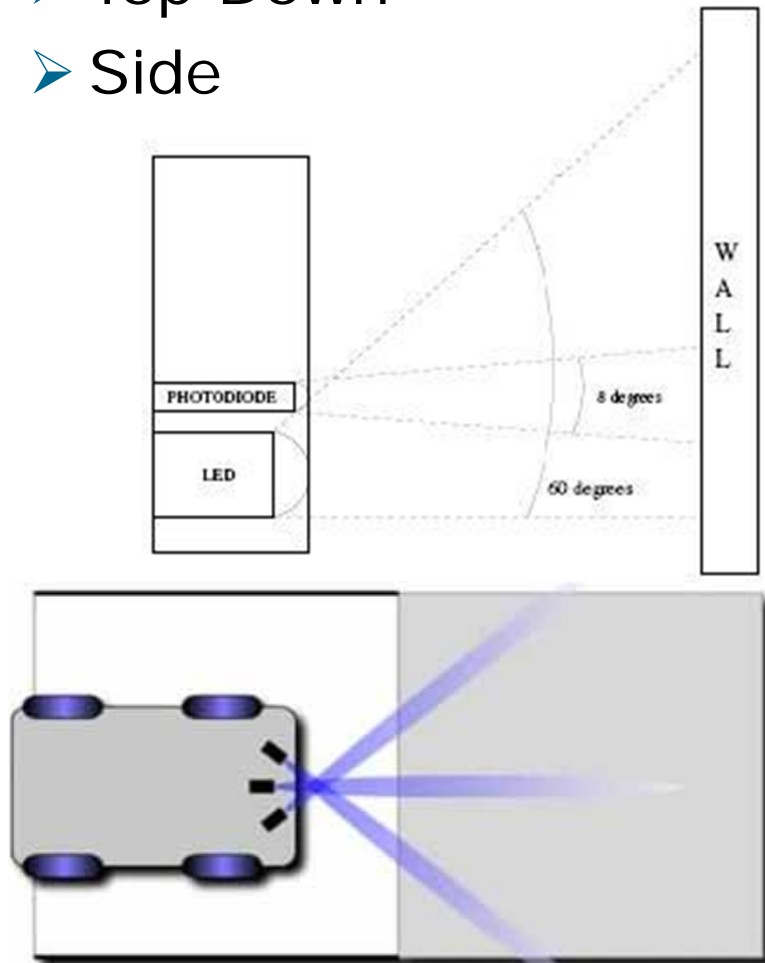



Micromouse Sensors

- Way of Sensing Walls

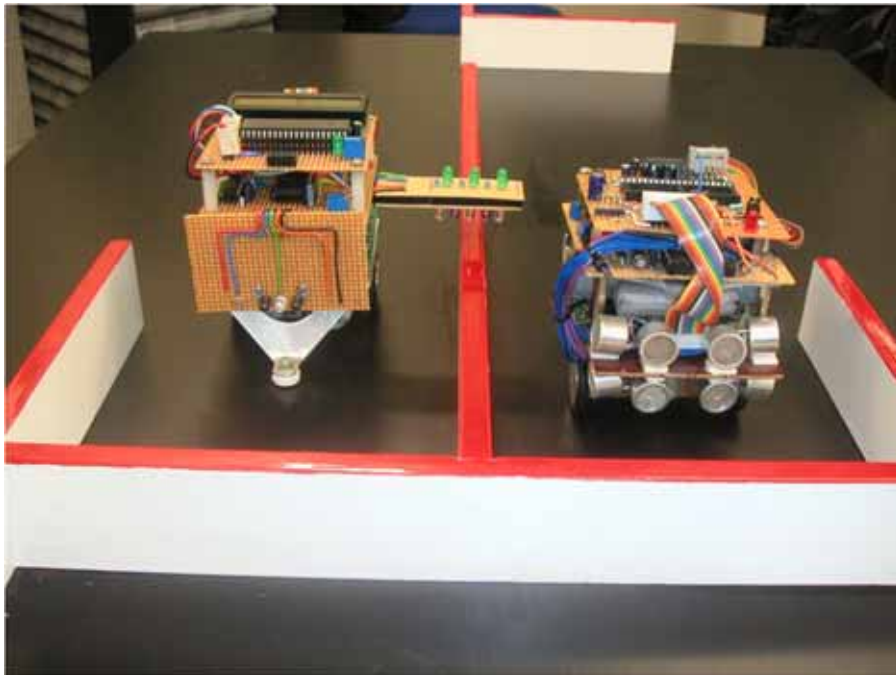


Micromouse Movements

- Basic Moves
 - Forward
 - Right Turn
 - Left Turn
 - U-Turn
 - Slow down and Stop
- Advance Moves
 - Diagonal Run
 - V-Turn
 - J-Turn
- Movements
 - Exploring, Fast run

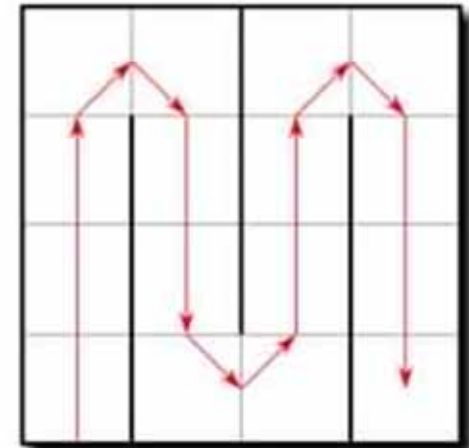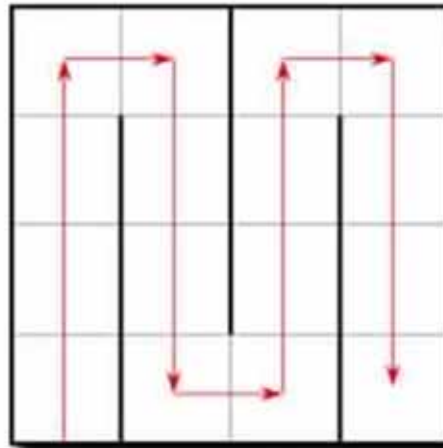

Sensors Position for Movement

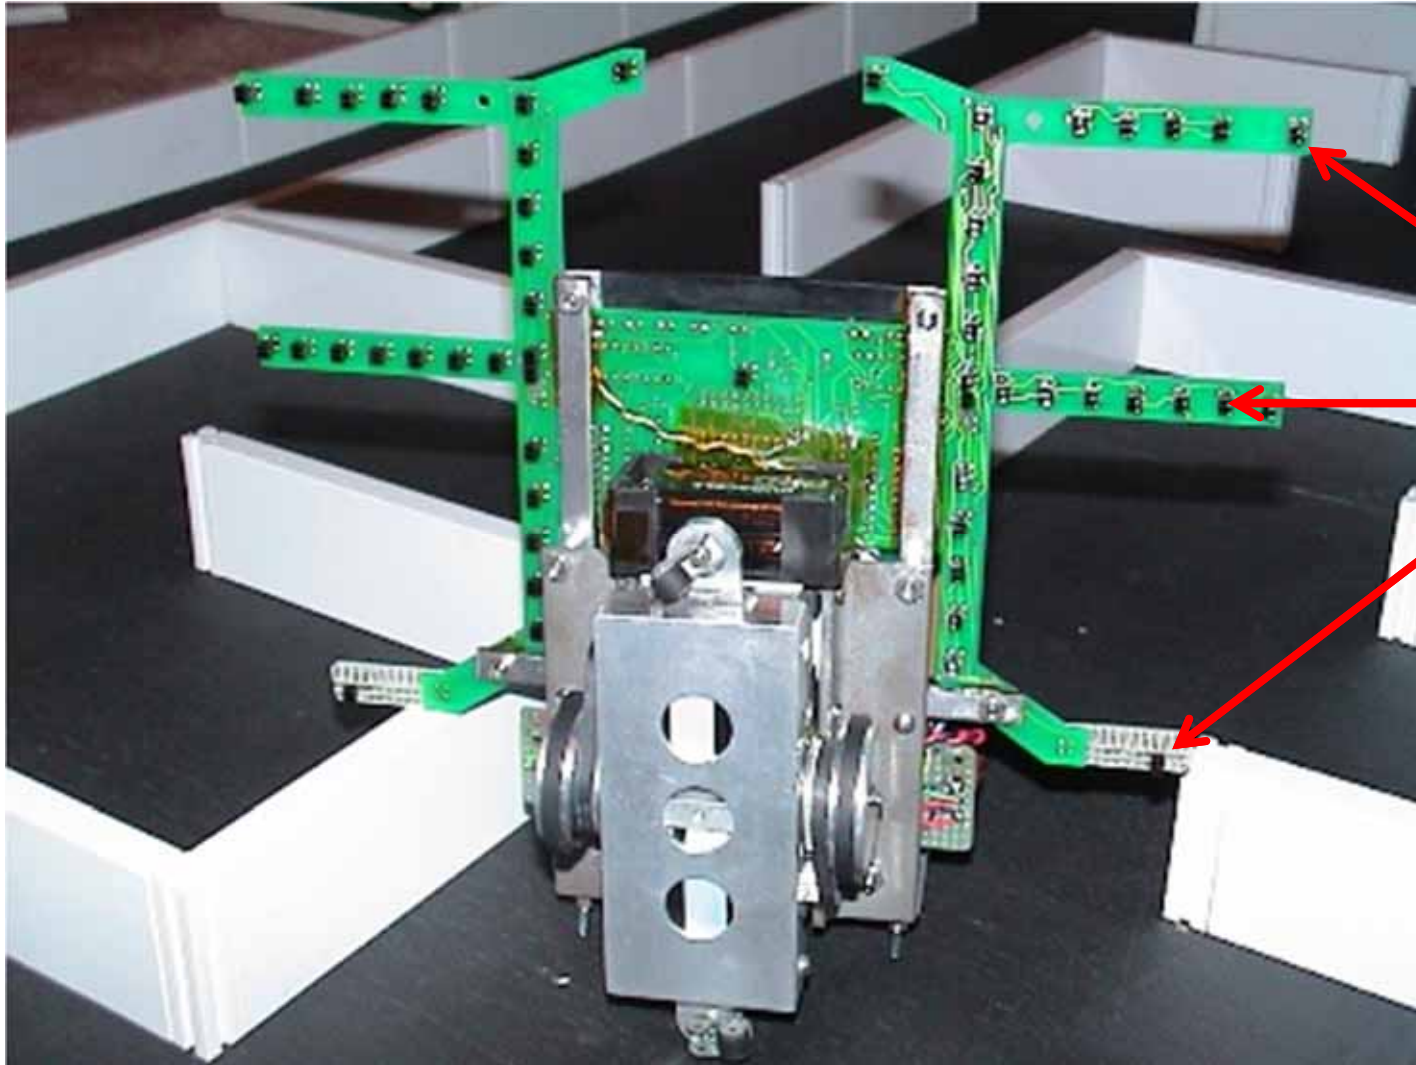

Infra-Red
Sensors


Micromouse Motors

- Type of Motors

- Stepper Motor
- DC Motor
- Servo Motor
- Brushless Motor



- Each micromouse should have at least 2 motors

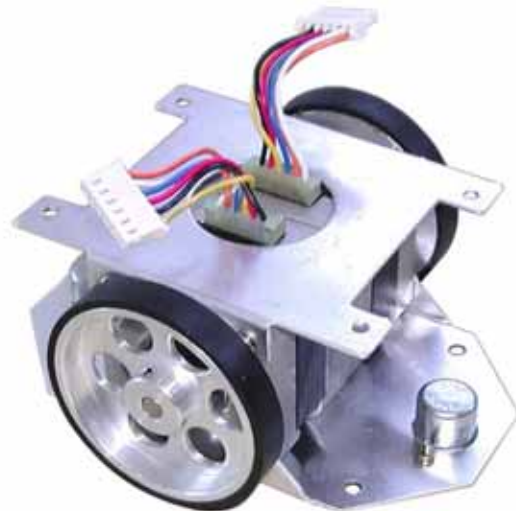

Software


■ Navigation Algorithm

- Micromouse must be able to keep track of its position.
- Micromouse also need to remember all the junctions. At dead end or old path encountered, the mouse shall select a junction that will lead to a new path.
- To make use of the exploring rules more effectively, a maze will be divided into several exploring sections. Each section uses different rule to explore.
- When reached the destination, the micromouse will decide whether to come back for a fast run or just continue exploring.
- A weight is used by the sorting program to determine whether the micromouse is more favorable to forward move or left and right turns.

Software (continue)

- Maze Solving
 - To search the shortest path from Start square to Goal for the fast run.
- Main Control
 - Micromouse to make decision on the next move in the maze.
 - Avoiding Crash
- Motor Control
 - Micromouse movements
- Sensor Control
 - Acquiring Walls information
 - Store data for maze sorting
 - Sensor sensitivity calibration

Available Micromouse Kits

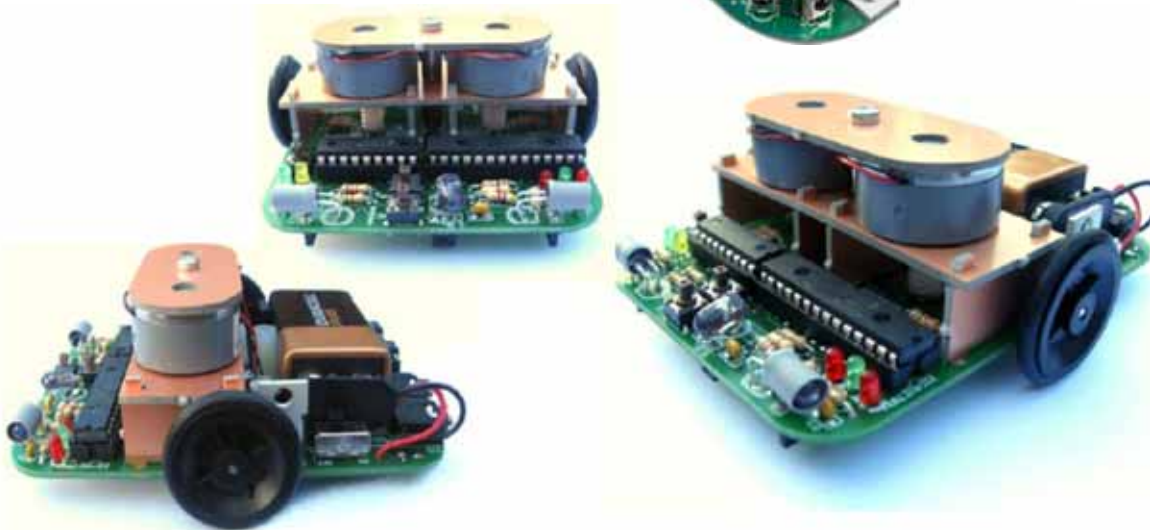

<http://www.rev-ed.co.uk/docs/KIT110.pdf>

<http://www.robotstorehk.com/micromouse/RS-AIRAT2.html>

Micromouse Development Plan

■ Hardware

➤ CPU Board

- ❖ Select Micro-Controller
- ❖ Learn about the Micro-Controller
- ❖ Design CPU circuit (PCB Layout)
- ❖ Wiring and Soldering
- ❖ Testing CPU

➤ Sensor Board

- ❖ Select Sensors
- ❖ Determine Sensors Location
- ❖ Design Sensor Circuit (PCB Layout)
- ❖ Wiring and Soldering
- ❖ Testing Sensor Board

Micromouse Development Plan

■ Hardware

➤ Motor Driver Board

- ❖ Select Motor
- ❖ Design Motor Driver circuit (PCB Layout)
- ❖ Wiring and Soldering
- ❖ Testing Motor Drive Board

➤ Power Supply

- ❖ Determine Power and Voltage requirements
- ❖ Select Batteries
- ❖ Testing Power Supply

➤ Chassis

- ❖ Mounting Motors and all PCBs with interconnection
- ❖ Wheel and Gears

Micromouse Development Plan

■ Software

- Familiar with Micro-Controller Language (C Language)
- Maze Solving Algorithm
- Shortest Path Algorithm
- Search Algorithm
- Motor Control Coding
- Sensor Control Coding
- Test and Debugging



Region 1 Student Conference 2016



2016 IEEE Region 1 Student Conference



The banner features a collage of images: a building on the left, a group of students at a table, a group standing in a hallway, a person presenting to an audience, and a group of people in a meeting. The text is centered and right-aligned.

**2016 IEEE REGION 1
STUDENT CONFERENCE**

April 15 - 16, 2016 | Central Connecticut State University (CCSU), New Britain CT

IEEE
Advancing Technology
for Humanity

► Conference Highlights:

Undergraduate Student Paper Contest , Student Ethics Competition, T-Shirt Design Competition, Micromouse Competition, Workshops, Award Ceremony and Dinner, Networking Opportunity, Meet IEEE Leaders and Industry Professionals

► To register:

<https://meetings.vtools.ieee.org/m/37907>

2015 Region 1 Student Conference - the highlights



A group of men in business attire are talking. One man in a white polo shirt is holding a white coffee cup.



IEEE Region 1 Micromouse Competition

- ▶ Micromouse Competition
 - ▶ The objective of the competition is to build a robot which can negotiate a specified maze in the shortest time.
 - ▶ **First Place: \$800, Second Place: \$500, Third Place: \$200**
- ▶ Eligibility:
 - ▶ The entrant must be an undergraduate student at a school in the Region at which there is an IEEE Student Branch at the time of entry at the Branch contest.
 - ▶ A Student must complete and submit an application for membership in IEEE prior to entry in the contest.

2015 Region 1 Micromouse Competition - student participants




2015 Region 1 Micromouse Competition - actions



2015 Region 1 Micromouse Competition - more actions



2015 Region 1 Micromouse Competition - Micromouse

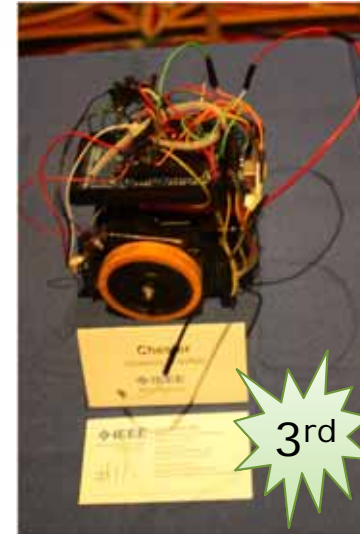

2015 Region 1 Micromouse Competition - more Micromouse




2015 Region 1 Micromouse Competition - winners

1st Place

(Run time to Goal = 14.97sec)



Mercury Micromouse

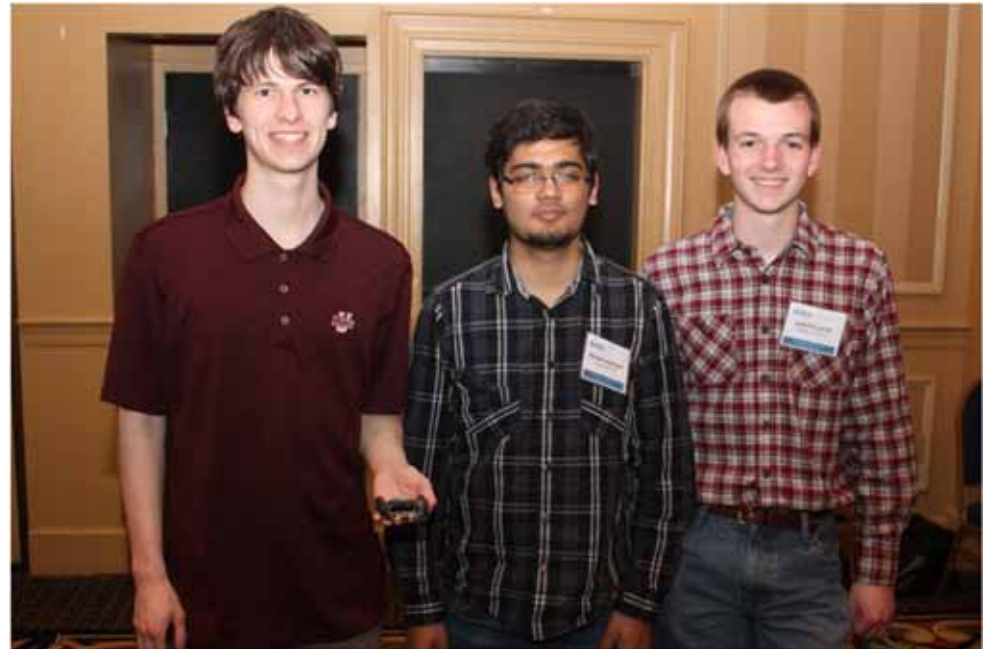


University of Massachusetts Amherst

- Justin Marple (Team Leader)
- Rohan Kapoor
- Aaron Lucia

2015 Region 1 Micromouse Competition - winners

2nd Place
(Run time to Goal = 48.76sec)

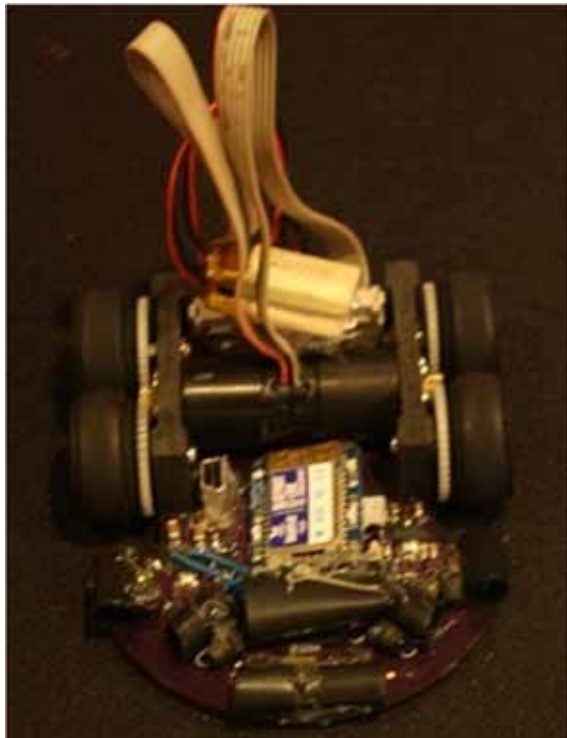

MegaMouse Micromouse




University of Buffalo

- Kyle Thompson (Team Leader)
- Mack Ward
- Joe Materski
- Jimmy Mazur
- Tomasz Pietruszka

2015 Region 1 Micromouse Competition - winners

3rd Place
(1st Closest to the Goal)

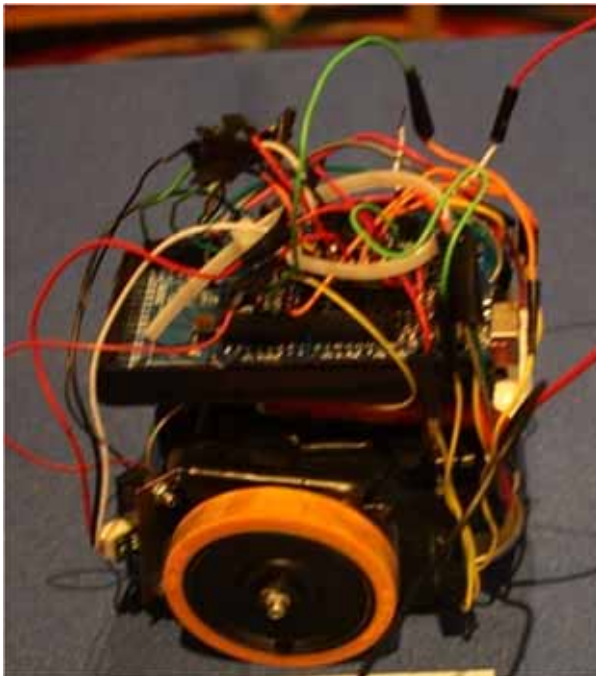

Chester Micromouse




University of Buffalo

- Mike Szymkowski (Team Leader)
- Matt Spitzer
- Maxim Solomonyuk
- Nazia Hasan
- Carly Schulz
- Kevin McMahon

2015 Region 1 Micromouse Competition - winners

4th Place
(2nd Closest to the Goal)

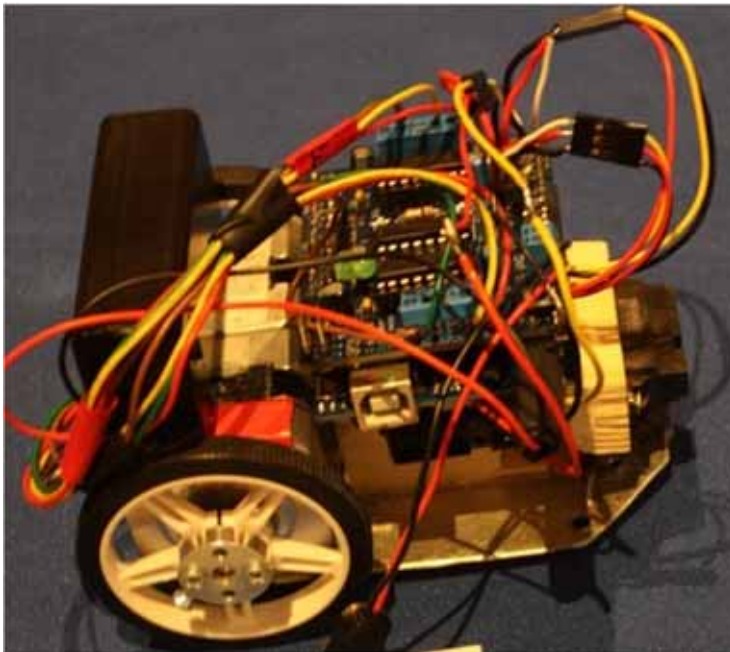

Minute Micromouse




Suffolk University

- Frank Calderon (Team Leader)
- Michael Wall

2015 Region 1 Micromouse Competition - winners

5th Place
(3rd Closest to the Goal)

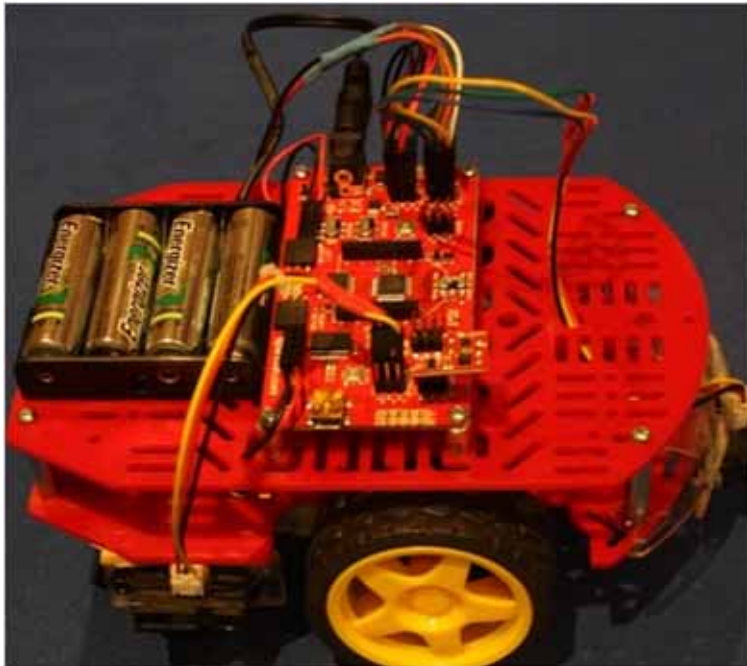

Squeak Micromouse




Roger Williams University

- Ethan Daniels (Team Leader)
- Taylor Winnick, Nicole Marmo
- Nicholas Benoti, Kyle Lourens
- Kristi Perreault, Aidan Bradley
- Kelsey Cintorino

2015 Region 1 Micromouse Competition - special award

Funny Award

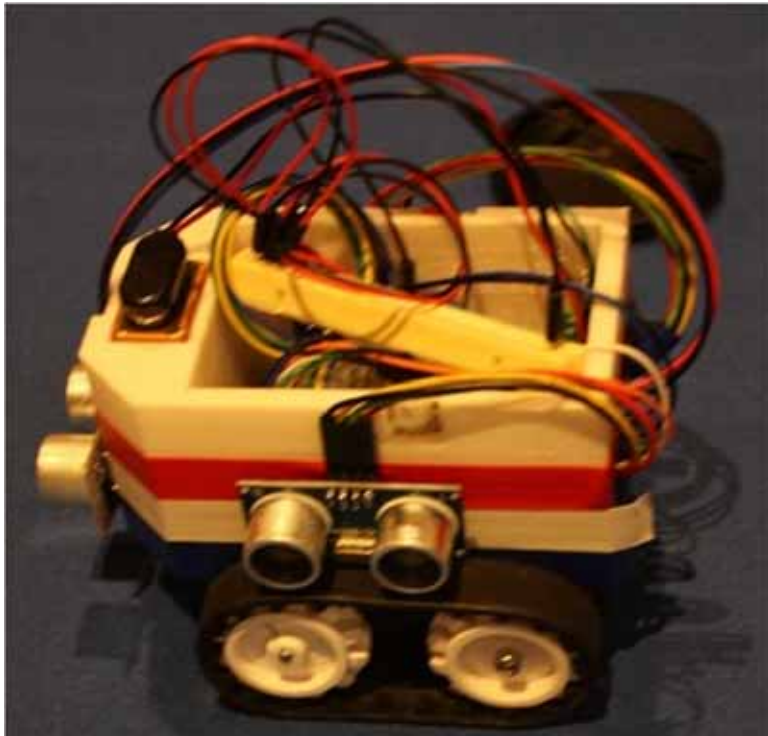

Grody Micromouse



Monmouth University

- James Blessing (Team Leader)
- Abdul Muhsin Al-Kandari
- Nico Flora
- Alex Kristensen
- Veronica Granite


2015 Region 1 Micromouse Competition - the judges



Alvin Joseph, Green Mountain Section
Bala Prasanna, Region 1 Treasurer \$\$\$
Bob Pellegrino, Region 1 Southern Area Chair
Anthony Wan, Future IEEE Member
Dave Haramé, Green Mountain Section
Rob Vice, Region 1 Young Professionals Coordinator



Thank you

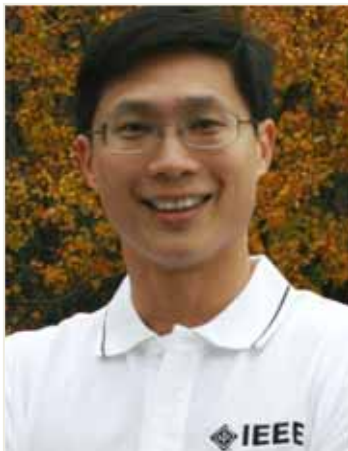

[Soon Wan](#)

2015 Region 1 Student Conference
Micromouse Competition Chair

gimsoon@ieee.org





IEEE Region 1



Micromouse Design Open Discussion



2012 Region 1 Student Conference at Hartford CT





2012 Region 1 Micromouse Competition at Hartford CT



1st



2nd

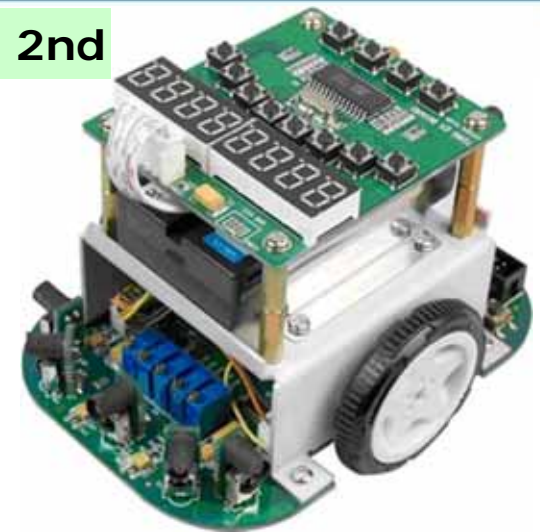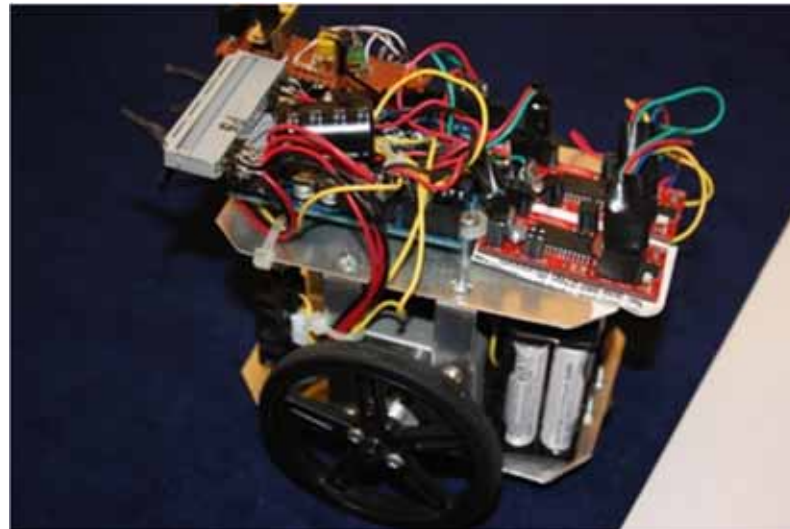

<http://www.youtube.com/watch?v=DuG-WF9yT5c>

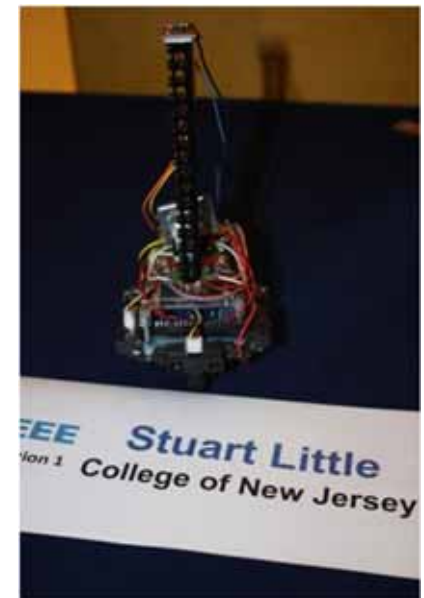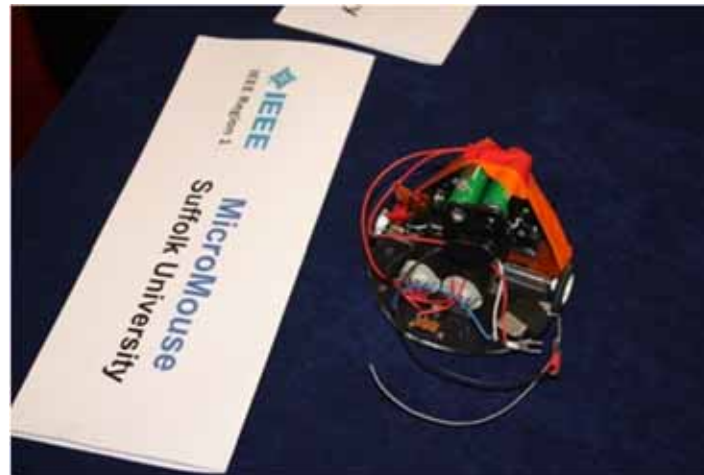


2012 Region 1 Micromouse Competition at Hartford CT



2011 Region 1 Micromouse Competition at Boston University



2011 Region 1 Micromouse Competition at Boston University

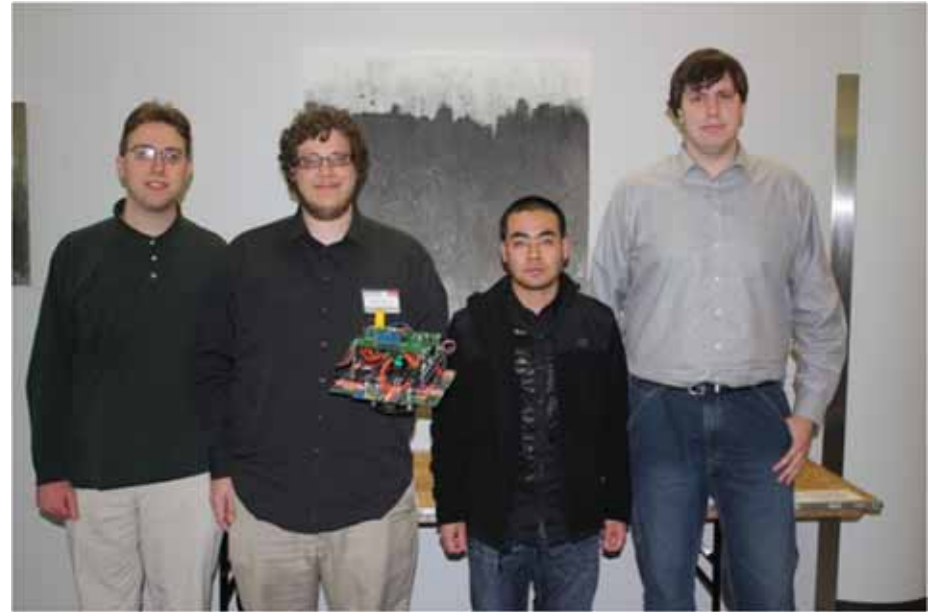

2011 Region 1 Micromouse Competition at Boston University



2006 Region 1 Micromouse Competition at University of Maine



1st: The College of New Jersey



2nd & 3rd: Suffolk University



4th: Fairleigh Dickinson University



Region 1 Micromouse Competition

